










MFCW

MARINE WATERTIGHT FIRESTOP COLLARS

COLLAR ESTANCO AL AGUA
COLLIER ÉTANCHE




INSTALLATION INSTRUCTIONS With Weld Precaution

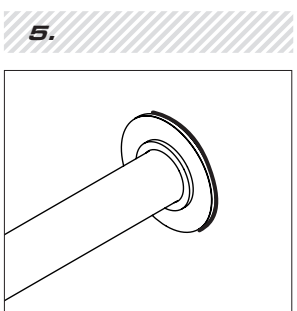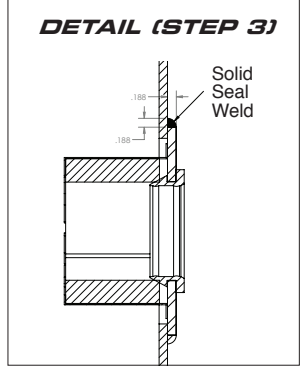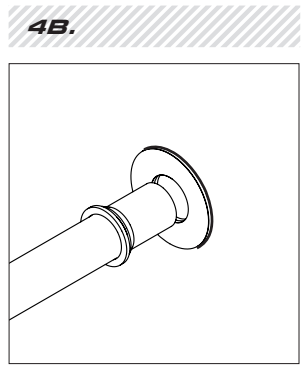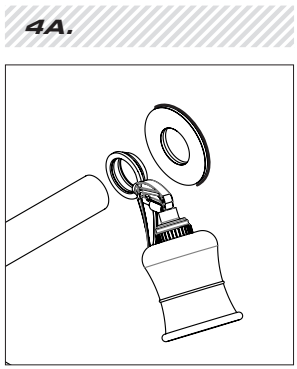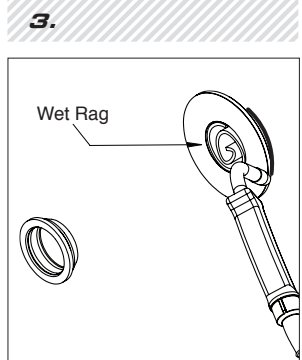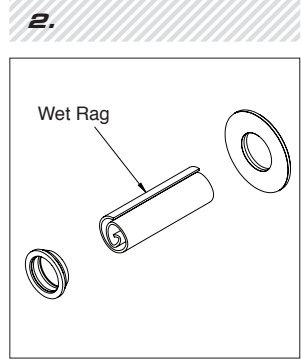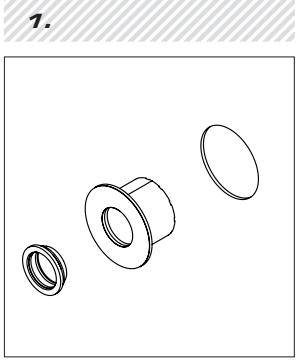

LIMITED WARRANTY: STI warrants that its products will be free of defects for one year from the date of purchase. In the event a product does not conform to this warranty, the sole and exclusive remedy is, at STI's option, replacement of the product or refund of the purchase price. The warranty provided herein shall be void and of no effect in the event that the product is not installed in accordance with STI's published instructions, listed systems and applicable building and safety codes. THIS WARRANTY IS IN LIEU OF ALL OTHER REPRESENTATIONS AND EXPRESSED OR IMPLIED WARRANTIES (including the implied warranties of merchantability or fitness for a particular use) AND UNDER NO CIRCUMSTANCES SHALL STI BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES OR LOSSES, INCLUDING, WITHOUT LIMITATION, ANY LOSS OF REVENUE, PROFIT OR USE. Prior to use, the user shall determine the suitability of the product for its intended use, and the user assumes all risks and liability for subsequent use. No person other than an officer of STI is authorized to bind STI to any other warranty for any product for which this warranty is issued.

COLLAR DIMENSIONS:

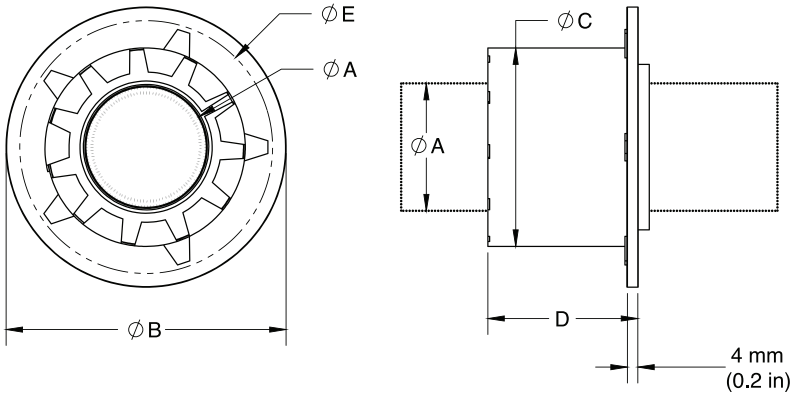

	A		B		C		D		E	
	mm	in	mm	in	mm	in	mm	in	mm ± 5	in ± 0.2
MFC16W	16	0.6	71	2.8	34	1.3	70	2.8	44	1.7
MFC20W	20	0.8	77	3.0	39	1.5	70	2.8	48	1.9
MFC25W	25	1.0	82	3.2	45	1.8	70	2.8	53	2.1
MFC32W	32	1.3	88	3.5	52	2.0	70	2.8	60	2.4
MFC40W	40	1.6	102	4.0	57	2.2	70	2.8	68	2.7
MFC50W	50	2.0	112	4.4	81	3.2	60	2.4	90	3.5
MFC60W	60	2.4	121	4.8	95	3.7	60	2.4	100	3.9
MFC63W	63	2.5	130	5.1	100	3.9	60	2.4	103	4.1
MFC75W	75	3.0	142	5.6	112	4.4	60	2.4	115	4.5
MFC90W	90	3.5	165	6.5	124	4.9	60	2.4	130	5.1
MFC110W	110	4.3	183	7.2	143	5.6	60	2.4	150	5.9
MFC115W	115	4.5	186	7.3	148	5.8	60	2.4	165	6.5
MFC125W	125	4.9	202	8.0	161	6.3	116	4.6	175	6.9
MFC140W	140	5.5	218	8.6	175	6.9	116	4.6	190	7.5
MFC160W	160	6.3	245	9.6	196	7.7	116	4.6	210	8.3
MFC169W	169	6.7	275	10.8	200	7.9	116	4.6	220	8.7
MFC200W	200	7.9	315	12.4	249	9.8	140	5.5	250	9.8
MFC219W	219	8.6	345	13.6	263	10.4	140	5.5	270	10.6
MFC225W	225	8.9	350	13.8	271	10.7	140	5.5	275	10.8
MFC273W	273	10.7	400	15.7	316	12.4	140	5.5	323	12.7
MFC324W	324	12.8	450	17.7	368	14.5	140	5.5	370	14.6